



DC12-85 (12V85Ah)

DC (Deep Cycle) series is specially designed for frequent cyclic discharge. By using strong grids and specially designed active material, the DC series battery offers 30% more cyclic life than the standby series. It is suitable for solar energy systems, marine and RV etc.

AUS CELL No. 1




Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	85Ah@10hr-rate to 1.80V per cell @25C °
Weight	Approx. 26Kg (Tolerance ±2%)
Max. Discharge Current	850 A (5 sec)
Internal Resistance	Approx. 5.2 mΩ
Operating Temperature Range	Discharge: -20 °C~60°C Charge: 0 °C~50°C Storage: -20C~60C °
Normal Operating Temperature Range	25C±5C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25C °
Recommended Maximum Charging Current Limit	27A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25C °
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25C. Self-discharge ratio less than 3% per month at 25C. Please charge batteries before using.
Terminal	Terminal F15/F12
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



Dimensions

Unit: mm Dimension: 306.5(L) × 168.5(W) × 235(H)

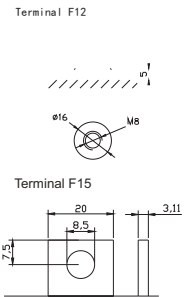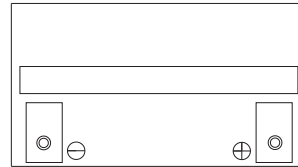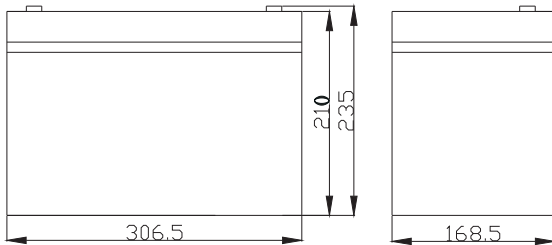

Constant Current Discharge Characteristics: A (25C) °


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	208.8	155.7	90.08	52.86	31.67	23.25	18.89	15.94	10.65	9.06	4.65
10.0V	202.6	151.6	88.10	51.88	31.21	22.95	18.65	15.76	10.55	8.97	4.61
10.2V	194.4	146.2	85.49	50.59	30.59	22.53	18.34	15.52	10.40	8.86	4.56
10.5V	183.8	139.2	82.06	48.88	29.77	21.99	17.93	15.19	10.21	8.71	4.49
10.8V	170.4	130.3	77.63	46.65	28.70	21.27	17.38	14.76	9.96	8.50	4.41
11.1V	153.5	118.9	71.96	43.79	27.31	20.33	16.66	14.19	9.63	8.24	4.29

Constant Power Discharge Characteristics: W(25C) °


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	2161	1657	996.4	602.0	365.5	270.5	220.8	187.2	126.7	108.5	55.72
10.0V	2153	1648	989.1	597.0	362.8	268.5	219.2	186.0	125.8	107.7	55.38
10.2V	2089	1603	965.1	584.1	356.7	264.4	216.1	183.5	124.3	106.4	54.83
10.5V	2011	1549	936.0	567.3	348.8	259.1	212.0	180.2	122.2	104.6	54.10
10.8V	1896	1470	894.4	544.0	338.0	251.6	206.2	175.7	119.5	102.3	53.11
11.1V	1739	1361	837.3	514.2	323.3	241.5	198.5	169.6	115.8	99.28	51.77

All mentioned values are average values (Tolerance ±2%).


Life characteristics of cyclic use

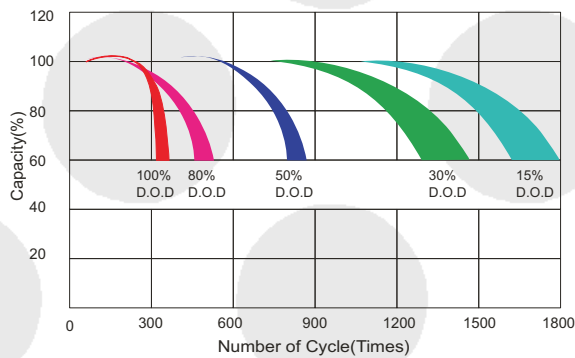


Storage characteristic

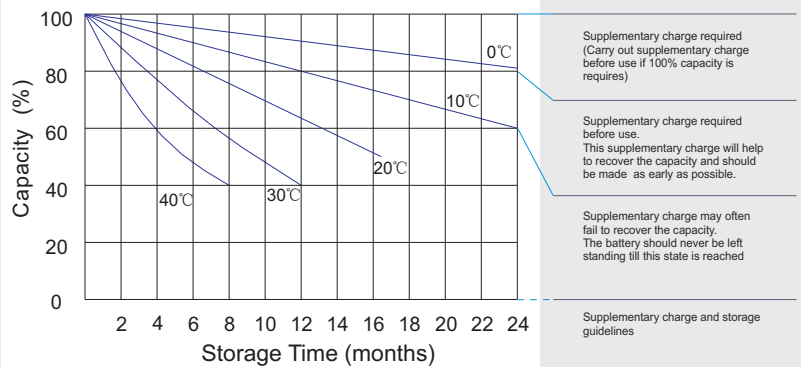

cyclic use

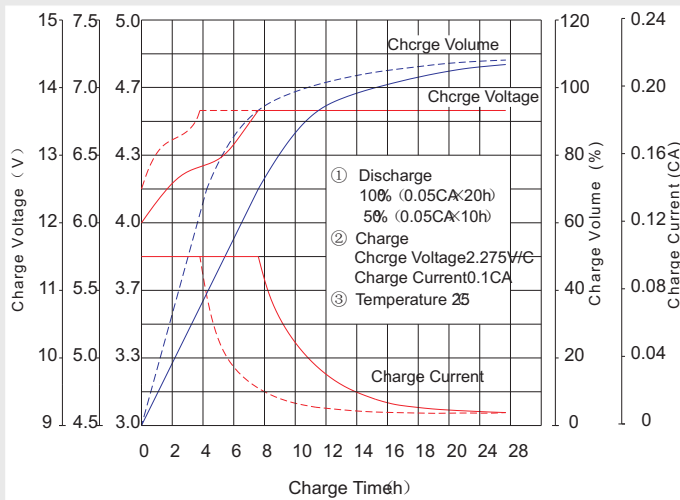

Discharge characteristic curve

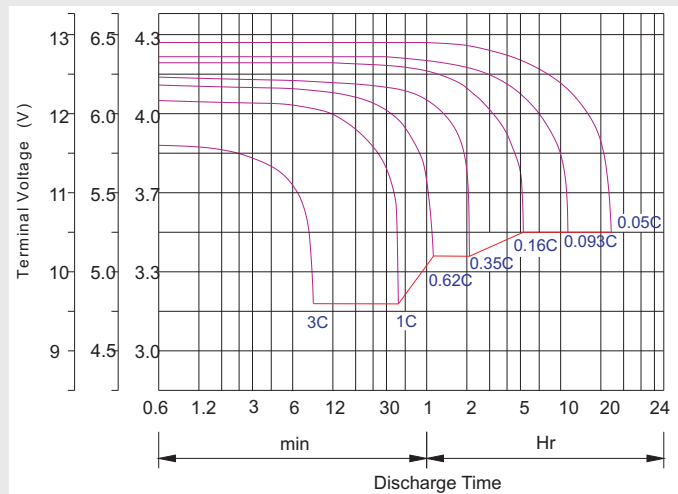

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current V S. Discharge Voltage

Final Discharge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service

- ✘ Avoid battery over discharge, especially battery series connection use.
- ✘ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ✘ Effect of temperature on cycle charge voltage: $-4mV/°C/Cell$.
- ✘ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6-7N-m	8-10N-m	10-12N-m