

EXITE-LTX

LTX
ECONOMY

EXIT & EMERGENCY
LED LIGHTING
PRODUCT RANGE



LIGHTING WITH CONFIDENCE



1300 246 247 ☎
info@firex.com.au ✉
www.firex.com.au 🌐

EXITE-LTX

LED Exit Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Exit Light

PRODUCT CODE : EXEXL

The Exite LTX range Exit Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES

- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Wall or Ceiling easy mount
- ❖ All Directional Decal variations included
- ❖ Interchangeable with Surface Mount Blade Exit Light (EXEXBLSM)
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 5W Mains / 3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Maintained

IP Rating IP20
Construction (body / diffuser) ABS, ABS
Viewing Distance 24m
Installation Wall or Ceiling mount
Classification Co: D12.5, C90:D8
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 1500mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Exit Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Surface Mount Blade Exit Light

PRODUCT CODE : EXEXBLSM

The Exite LTX range Exit Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES



- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Wall or Ceiling easy mount
- ❖ All Directional Decal variations included
- ❖ Interchangeable with LED Exit Light (EXEXL)
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 5W Mains / 3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Maintained

IP Rating IP20
Construction (body / diffuser) ABS, ABS
Viewing Distance 24m
Installation Wall or Ceiling mount
Classification Co: D8, C90: D4
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 1500mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Exit Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.

LED Recessed Blade Exit Light

PRODUCT CODE : EXEXBLRE



The Exite LTX range Exit Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES


- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Easy installation into Ceiling spaces
- ❖ All Directional Decal variations included
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 5W Mains / 3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Maintained

IP Rating IP20
Construction (body / diffuser) ABS, ABS
Viewing Distance 24m
Installation Recess mount
Classification Co: D6.3, C90: D4
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 1500mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Exit Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.

LED Wall Mount Exit Light

PRODUCT CODE : EXEXWM



The Exite LTX range Exit Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.



FEATURES

- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Wall easy mount
- ❖ All Directional Decal variations included
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption	5W Mains / 3W Emergency
Colour Temperature (CCT)	6,000 (k)
Lamp Life	50,000 LED Hours
Operating Mode	Maintained
IP Rating	IP20
Construction (body / diffuser)	ABS, ABS
Viewing Distance	24m
Installation	Wall mount
Classification	Co: D10, C90: D8
Designed & Manufactured to	AS/NZS 2293.3

Battery type	Lithium Iron Phosphate LiFePO ₄
Battery Voltage / Capacity	3.2V / 1500mAh
Battery Charge / Standby	20hrs / 3hrs
Automatic Self-Test	Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Exit Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Ceiling Mount Exit Light

PRODUCT CODE : EXEXCM

The Exite LTX range Exit Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES



- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Ceiling easy mount
- ❖ All Directional Decal variations included
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 5W Mains / 3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Maintained

IP Rating IP20
Construction (body / diffuser) ABS, ABS
Viewing Distance 24m
Installation Ceiling mount
Classification Co: D12.5, C90: D12.5
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 1500mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by

FIREX

EXITE-LTX

LED Emergency Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Emergency Downlight (Recessed)

PRODUCT CODE : EXEMSP3RE

The Exite LTX range Emergency Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES


- ❖ 50,000 hours lamp life
- ❖ Lithium Iron Phosphate battery (LiFePO₄)
- ❖ Easy installation into ceiling spaces
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 5W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Non-Maintained

IP Rating IP20
Construction (body / diffuser) ABS, ABS
Installation Recessed
Classification C0: D40, C90: D40
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 3000mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Emergency Lighting

Combining LED technology with Lithium batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Emergency Twin Spot Light

PRODUCT CODE : EXEMTS

The Exite LTX range Emergency Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES


- ❖ 50,000 hours lamp life
- ❖ Lithium battery
- ❖ Wall easy mount
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 2*3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Non-Maintained

IP Rating IP65
Construction (body / diffuser) ABS, ABS
Installation Wall Mount
Classification C0: D2.5, C90: D4.0
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium
Battery Voltage / Capacity 3.7V / 2600mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test No



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by

FIREX

EXITE-LTX

LED Emergency Lighting

Combining LED technology with Lithium batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Emergency Oyster Light

PRODUCT CODE : EXEMOYST

The Exite LTX range Emergency Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES



- ❖ 50,000 hours lamp life
- ❖ Lithium battery
- ❖ Surface easy mount
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 20W Mains / 4W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Non-Maintained

IP Rating IP65
Construction (body / diffuser) Steel, PMMA
Installation Surface Mount
Classification C0: D25, C90: D25
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium
Battery Voltage / Capacity 7.4V / 1800mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test No



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Emergency Lighting

Combining LED technology with Lithium Iron Phosphate (LiFePO₄) batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Emergency Batten (2ft or 4ft) Diffused / Wireguard

PRODUCT CODE : EXEMBTT210 / 218

The Exite LTX range Emergency Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES


- ❖ 50,000 hours lamp life
- ❖ Lithium battery
- ❖ Surface easy mount
- ❖ Diffused or Wireguard
- ❖ 600mm (2ft) and 1200mm (4ft)
- ❖ Automatic Self-Test Function
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 2'10W/18W Mains / 2'3W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Non-Maintained

IP Rating IP20
Construction (body / diffuser) Steel, PC
Installation Surface Mount
Classification C0: D12.5, C90: D12.5
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium Iron Phosphate LiFePO₄
Battery Voltage / Capacity 3.2V / 3000mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test Yes

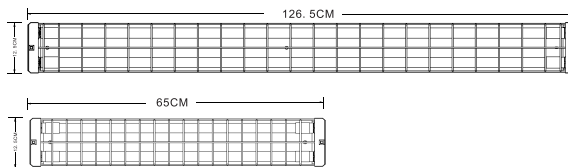

Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

EXITE-LTX

LED Emergency Lighting

Combining LED technology with Lithium batteries, the Exite LTX range provides customers with confidence they are installing long-lasting energy efficient lighting products.



LED Emergency Batten (2ft or 4ft) Weather Proof

PRODUCT CODE : EXEMBTT210WP / 218WP

The Exite LTX range Emergency Light uses latest LED technology that delivers high luminance and effective light distribution. Suited to a wide variety of installation methods, Exite's simple design will keep installers satisfied and provide architects with plenty of options to incorporate into a new construction or retrofit into an existing building layout.

FEATURES


- ❖ 50,000 hours lamp life
- ❖ Lithium battery
- ❖ Surface easy mount
- ❖ IP65 rated weatherproof enclosure
- ❖ Designed & Manufactured to AS/NZS 2293.3
- ❖ 3 years warranty (including battery)

QUICK SPECS

Power Consumption 2'10W/18W Mains / 3,5W Emergency
Colour Temperature (CCT) 6,000 (k)
Lamp Life 50,000 LED Hours
Operating Mode Non-Maintained

IP Rating IP65
Construction (body / diffuser) ABS, PC
Installation Surface Mount
Classification Co: D63 / D20 , C90: D32 / D12.5
Designed & Manufactured to AS/NZS 2293.3

Battery type Lithium
Battery Voltage / Capacity 7.4V / 2200mAh
Battery Charge / Standby 20hrs / 3hrs
Automatic Self-Test No

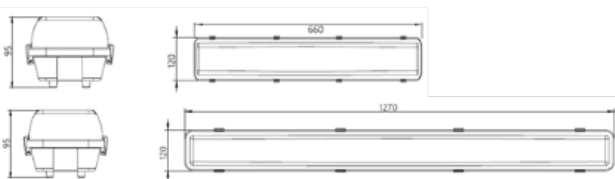

Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au

Another quality product by
FIREX

Extensive Range

The Exite LTX range has been designed to provide high visibility whilst remaining aesthetically pleasing. Exite uses latest LED technology and Lithium Iron Phosphate batteries. Exite products equipped with the LiFePO₄ battery contain an intelligent Automatic Self-Test Function that assist in prolonging battery life. That's why we are able to provide a full, manufacturer backed, 3 year warranty (including battery) from date of purchase. Our extensive range include spare parts and accessories – contact us to find out more.

EXITE LTX

LED Exit Light

EXEXL

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Base interchangeable with Blade style



LED Surface Mount Blade Exit Light

EXEXBLSM

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Base interchangeable with Normal style



LED Recessed Blade Exit Light

EXEXBLRE

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Suits 24m viewing distance



LED Ceiling Mount Exit Light

EXEXCM

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Suits 24m viewing distance



LED Wall Mount Exit Light

EXEXWM

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Suits 24m viewing distance



LED Emergency Downlight

EXEMSP3RE

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Flex and plugs included



LED Emergency Twin Spotlight

EXEMTS

- ❖ High output LEDs
- ❖ Lithium battery
- ❖ IP65 rating
- ❖ Easy wall mount



LED Emergency Oyster Light

EXEXMOYST

- ❖ High output LEDs
- ❖ Lithium battery
- ❖ Easy surface mount
- ❖ Lightweight construction



LED Emergency Battens 2ft & 4ft

EXEMBTT210/218

- ❖ High output LEDs
- ❖ LiFePO₄ battery
- ❖ Automatic self-test
- ❖ Diffused and Wireguard options



LED Emergency Weatherproof 2ft & 4ft

EXEMBTT210/218 WP

- ❖ High output LEDs
- ❖ Lithium battery
- ❖ IP65 rating
- ❖ Easy surface mount



Disclaimer: Product specifications, images and content are subject to change without prior notice and Firex Distribution Australia will not be held liable in any way for any errors or omissions.

© 2020 Firex Distribution Australia Pty Ltd. All Rights Reserved.

1300 246 247
info@firex.com.au
www.firex.com.au



Another quality product by

FIREX